


Product data sheet

Overhead concealed door closing device

ESD7383



- Power size: 2 to 4 adjustable by spring tension.
- Function: Closing, latching, cushion stop.
- Cover: no cover.
- Maximum door width: 1,100mm.
- Maximum door weight: 80kg.
- Successfully type tested for conformity to all the requirements of **BS EN 1154:1997**
 - Door mount pull side, transom mount pull side: 3 | 8 | 4/2 | 1* | 1 | 3.
- Included in a successful fire test to **BS EN 1634** Part 1. Assessed for use on 30, 60, 90 and 120 minute timber fire doors.

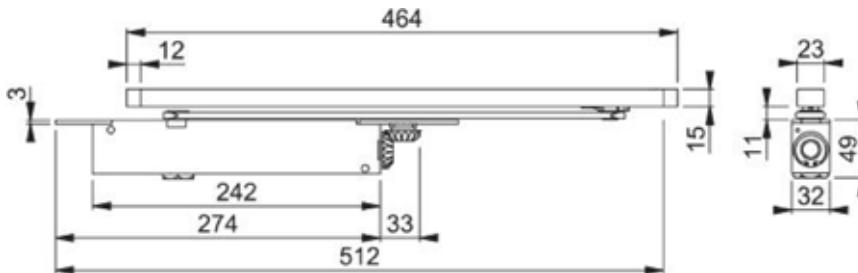

Drawing not to scale

Type	Mechanism and slide track
Door type	Timber door
Maximum door width	1100mm
Maximum door weight	80kg
Arm Application	Door mount concealed, transom mount concealed
Mechanism function	Spring adjustable, closing/latching speed
Mechanism type	Cam action
Fixings	Timber door Timber door
Shape	
Power size	2 to 4
Opening Angle	Max. 105° opening
Mechanism dimensions and fixing centres	276 x 32 x 45mm; centres 320 x 20mm; Track 424
Arm type	Concealed slide arm
Fire safety accessories	Intumescent kit, Mono-ammonium phosphate based
Finish	Satin nickel plate
Arm finish	Satin nickel plated