



Product data sheet


Stainless steel lever handle set on rose for interior doors

ESD - E138F/42K-A2



Door thickness	40-50mm
Spindle size	8mm
Spindle length	
Door type	Timber door
Fixings	8 N4 x 16mm wood screws, 2 bolts & allen key, A2 stainless steel, posidrive
Bearing	Sprung
Connection	Breakthrough spindle
Spindle size	8mm
Finish	Satin stainless steel

- Material: Stainless steel grade 304.
- Bearing: Fixed/movable.
- Connection: Solid spindle with eccentric hole on both ends.
- Base: Stainless steel.
- Fixing: Bolt through and wood screws.
- Testing: Included in a successful fire test to BS EN 1634 Part 1. Assessed for use on 30 and 60 minutes timber fire doors.

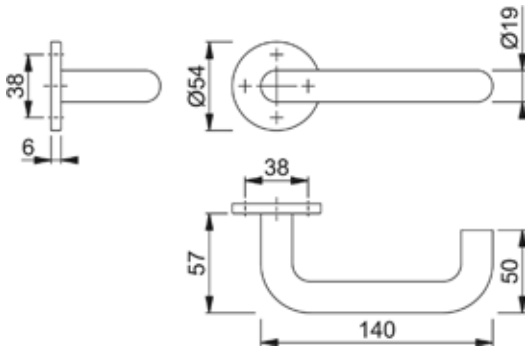

Drawing not to scale